

**STANDARD MATERIALS AND CONSTRUCTION**

**Formed Aluminum Equipment Support**

**SHELL &**

**BASEPLATE:** .063" thick (nominal) aluminum alloy 3003-H14. All seams are fully welded and sprayed with protective coating.

**CANT:** Mitered 3" x 3" integral cant.

**REINFORCEMENTS:** On 12" centers.

**NAILER:** Varies by width, factory installed.

**FINISH:** Mill.

**Formed Steel Curb Equipment Support**

**SHELL &**


**BASEPLATE:** 18 GA. galvanized steel. All seams are fully welded and sprayed with protective coating.

**CANT:** Mitered 3" x 3" integral cant.

**REINFORCEMENTS:** On 12" centers.

**NAILER:** Varies by width, factory installed.

**FINISH:** Mill.

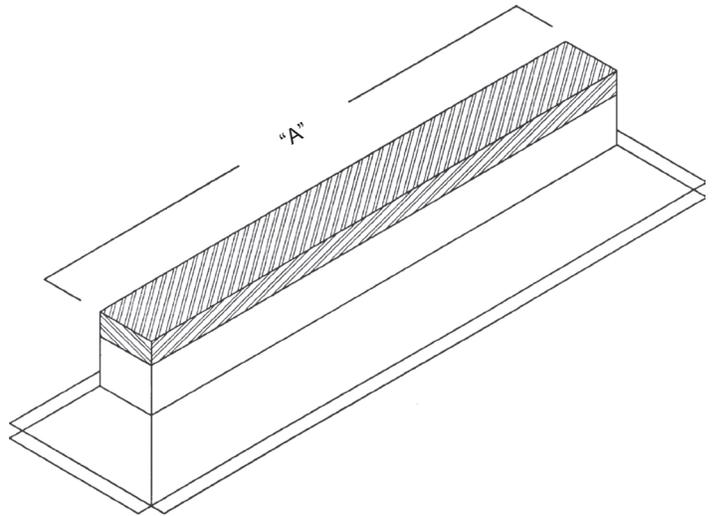

**OPTIONS**

**Aluminum Material** - Available in .081" - .125" thick 3003-H14 alloy


**Steel Material** - Available in various gauges of galvanized, galvaneal or stainless

**Pitched or Peaked** - In conjunction with the overall dimensions, both the height rise, specified in linear inches per foot (ex: 3" in 12") and the direction of the pitch must be specified.

**Counterflashing** - A removable metal cap fabricated of the same material as the equipment support provides for an effective method of attaching roofing felts.

**Gasket** - 1/4" thick polyurethane foam gasket can be installed, lining the entire top perimeter. Gasket can be used in place of, or in addition to a wood nailer.

**Finishes** - A wide selection of finishes include baked enamel, epoxy, or prime coat.

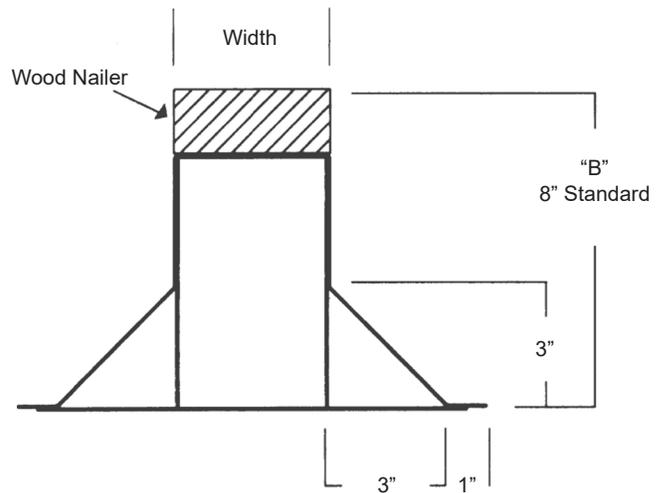

**NOTES**

1. "A" and "B" are opening dimensions.
2. If height or width exceed 90", multi-section construction may be required.

**EQUIPMENT SUPPORT WIDTH**

Nominal Width	Actual Nailer Width
4"	3½"
6"	5½"
8"	7½"
10"	9½"
12"	11½"

Item #	Qty	"A"	"B"	Width	Aluminum	Steel	Height Rise	Direction	
					Opening Dimensions				
<b>Arch. / Eng.:</b>				<b>EDR:</b>	<b>ECN:</b>	<b>Job:</b>			
<b>Contractor:</b>									
<b>Project:</b>				<b>Date:</b>	<b>DWN:</b>	<b>DWG:</b>			