MODEL FSAH

1" Deep • High Pressure Duct Access Door

STANDARD MATERIALS AND CONSTRUCTION

FRAME: 22-GA galvanized steel **DOOR PANEL:** 24-GA galvanized steel

INSULATION: 1" fiberglass

PRE-FORMED TABS: 22-GA galvanized steel

FINISH: Mill

OPTIONS


.032" Aluminum with Plated Steel Cams and Strikers 24-GA Stainless Steel with Stainless Steel Cams and Strikers

NOTES


- 1. "A" width and "B" height are opening dimensions.
- 2. Standard construction to 10" Static Pressure.
- 3. On non standard doors, the height is always the larger dimension.


DOOR SIZES

Panels	Standard Sizes	FSA100H Cams	FSA101H Cams
FSA	6"W x 6"H	3	4
	8"W x 8"H	3	4
	10"W x 10"H	3	4
	12"W x 12"H	3	4
	14"W x 14"H	3	4
	16"W x 16"H	6	8
	18"W x 18"H	6	8
	20"W x 20"H	6	8
	24"W x 24"H	6	8



FSA101H



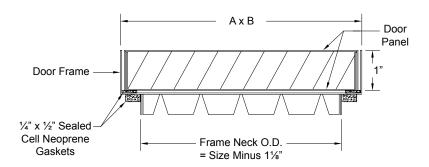



February 2013		SD-FSAH-13.02
rebluary 2013	MODEL FSAH	3D-F3AH-13.02
	1" Deep • High Pressure Duct Access Door	
	This page intentionally left blank.	
		air balance
		<u>air balance</u>
		Dampers Louvers UL Life Safety Products Division of Meetak
In the interest of product development, Ai	r Balance reserves the right to make changes without notice.	Division of Mestek Member of AMCA

In the interest of product development, Air Balance reserves the right to make changes without notice. 450 Riverside Rd • Wyalusing PA, 18853 • Phone 570-746-1888 • Fax 570-746-9286