

MODEL P465M/P655M

4" or 6" Deep • Straight Blade • Mitered Extruded Aluminum Penthouse

STANDARD MATERIALS AND CONSTRUCTION



- FRAME:** .081" thick nominal; 6063-T6/T52 extruded aluminum alloy with reinforcing rib bosses
- BLADES:** .081" thick nominal; 6063-T6/T52 extruded aluminum alloy with reinforcing rib bosses
- ROOF:** Removable roof .060" thick sheet aluminum reinforced with aluminum bracing where required to take a snow load of 40 lbs/sq.ft. plus a required safety factor
- INSULATION:** ½" thick insulation on underside of roof
- SCREEN:** ½" x .051" flattened galvanized birdscreen
- FINISH:** Mill

OPTIONS



- Finish - Baked Enamel, Kynar, or Anodize
- Variety of Bird and Insect Screen
- .125" Nominal Construction
- Sloped Roof

NOTES

1. "A" width and "B" height are opening dimensions. Penthouse dimensions "A" or "B" exceeding 84" shall be shipped in section for field assembly by others.

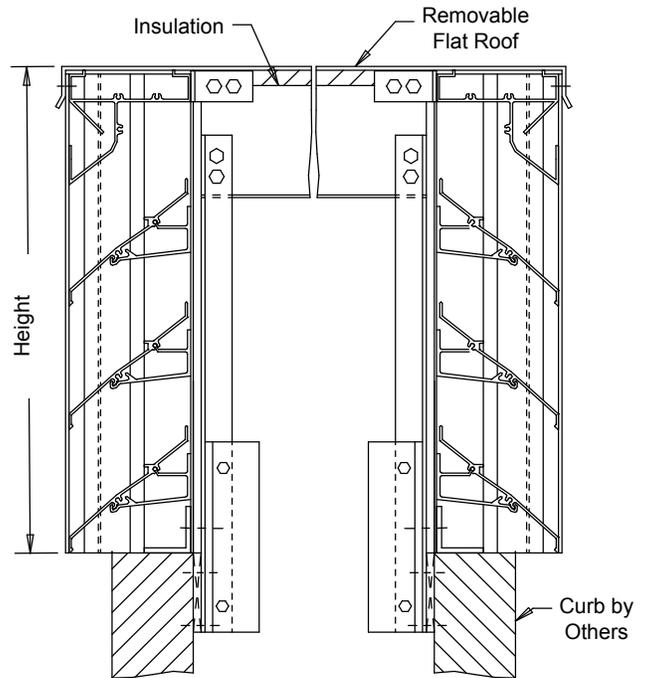

Angles - All Corners and Intermediate, to Extended from Roof into Curb

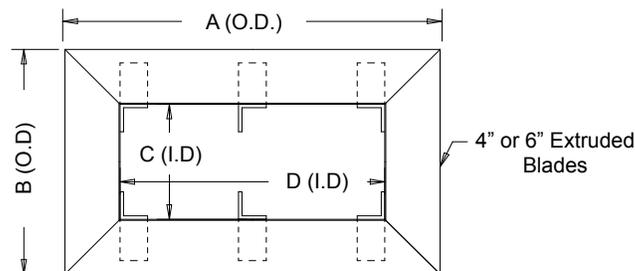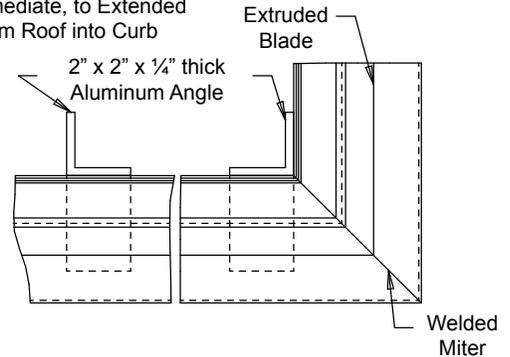

Continuous Angles at the Four Corners and Intermediate as Required

MODEL P465M/P655M

4" or 6" Deep • Straight Blade • Mitered Extruded Aluminum Penthouse

This page intentionally left blank.